



Heuriedweg 20
D-88131 Lindau (B)

Tel: +49 (0)8382/27737-0
Fax: +49 (0)8382/27737-29
info@spezialnetze.com
www.spezialnetze.com



MBB Industrial Components GmbH

STAGE COVER

Woven stage cloths

Indoor and outdoor events, such as concerts, open-air theatres, garden parties, etc., benefit from having a well presented stage area.

The **MBB SC** range of stage covers is the ideal solution.

The **SC** range is available in two different weights and densities and in a variety of colours to suit all situations.

A recent innovation is that **SC** can be supplied UV stabilised or impregnated with a **flame retardant** to DIN 4102 B1 standard.

The **SC** range can also be supplied printed with company names and logos or other promotional messages.



The **SC** is available either in sheets cut to the size required by the customer with reinforced borders and metal eyelets every 50cm or in standard rolls.

The **MBB SC** range:

- Provides excellent screening factors
- Is washable
- Can be supplied UV stabilised or with B1 flame retardant
- Are strong, but light
- Are easy to set up and dismantle
- Provides good protection from the weather
- Are recyclable.






Heuriedweg 20
D-88131 Lindau (B)

Tel: +49 (0)8382/27737-0
Fax: +49 (0)8382/27737-29
info@spezialnetze.com
www.spezialnetze.com



MBB Industrial Components GmbH

STAGE COVER

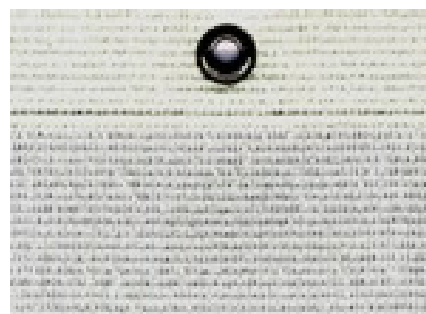

TECHNICAL DATA

Type	SC0304 /UV	SC0314 /B1	SC0404 /UV	SC0414 /B1
Polymer	HDPE	HDPE	HDPE	HDPE
Density at 23 °C ¹	0,946 g/m ³	0,946 g/m ³	0,946 g/m ³	0,946 g/m ³
Melting point 190/5MF1-g/10min	1,4	1,4	1,4	1,4
Weight ²	140 g/m ²	140 g/m ²	200 g/m ²	200 g/m ²
Air permeability ³	271,6cm ³ /cm ² s	271,6cm ³ /cm ² s	220,7cm ³ /cm ² s	220,7cm ³ /cm ² s
Shading factor ⁴	60% to 75% depending on colour	60% to 75% depending on colour	57% to 89% depending on colour	66% to 90% depending on colour
UV stabilised*	YES	NO	YES	NO
B1 fire retardant* ⁵	NO	YES	NO	YES
Tensile strength – MD	683,71 N	683,91 N	1168,14 N	969,60 N
Breaking elongation – MD	64,64%	65,05%	61,43%	78,25%
Tensile strength – TD	493,47 N	428,33 N	544,05 N	378,60 N
Breaking elongation – TD	36,92%	37,20%	59,63%	77,60%
Chemical resistance	High resistance to solvents up to 60°C. Not resistant to oxidation products and halogens	High resistance to solvents up to 60°C. Not resistant to oxidation products and halogens	High resistance to solvents up to 60°C. Not resistant to oxidation products and halogens	High resistance to solvents up to 60°C. Not resistant to oxidation products and halogens
Standard colours	Black, White	Black, White	Black, White	Black, White
Other colours available	Dark green, Light green, Blue, Metallic Blue, Red, Orange, Silver	Grey, Dark Green, Orange, Blue, Silver	Grey, Dark green, Light green, Purple, Metallic blue, Blue, Sapphire blue, Red, Orange, Yellow, Beige, Silver	Grey, Dark green, Blue, Sapphire blue, Red, Orange, Yellow, Silver

¹ DIN 53479

² ASTM D 3776

³ ASTM D 737

⁴ ASTM 1494 – 92

⁵ DIN 4102

MD = Longitudinal (DIN 53857)

TD = Transversal (DIN 53857)

For quick, easy and secure mounting of SC

SPANQUICK
Elastic cables

Available in black
or white

